

# Quick Tread - Stand Alone

## Flush Mounted

**HUNTER**  
Engineering Company




Stand-Alone Flush Mount Quick  
Tread Installation

| Site Specifications            |  |
|--------------------------------|--|
| Power Requirements             | 115/230v, 15 amp* 50/60 Hz 1 ph <sup>†</sup> |
| Air Supply Req. (IS Units)     | 90-150 PSI (6.2-10.3 bar)                    |
| Approximate Air Consumption    | 25 SCFM @ 90 PSI<br>(648 Lpm @ 6.2 bar)      |
| Substructure Specifications    | Refer to Form 6905-T                         |
| Pedestal Location              | 36 - 96 in. (914 - 2438 mm) from QT1F        |
| Product Specifications         |  |
| Max. Wheel Weight              | 3500 lb. (1588 kg) per wheel                 |
| Test Entry Speed               | 2 to 8 mph (3-13 km/h)                       |
| Shipping Weight                |  |
| Quick Check Cabinet            | 290 lbs (132 kg)                             |
| Quick Check Drive Under Sensor | 316 lbs (143 kg)                             |
| Quick Tread                    | 1723 lbs (455 kg)                            |

\* Amperage shown is minimal circuit rating.

<sup>†</sup> Isolated ground recommended.

### OVERALL FOOTPRINT

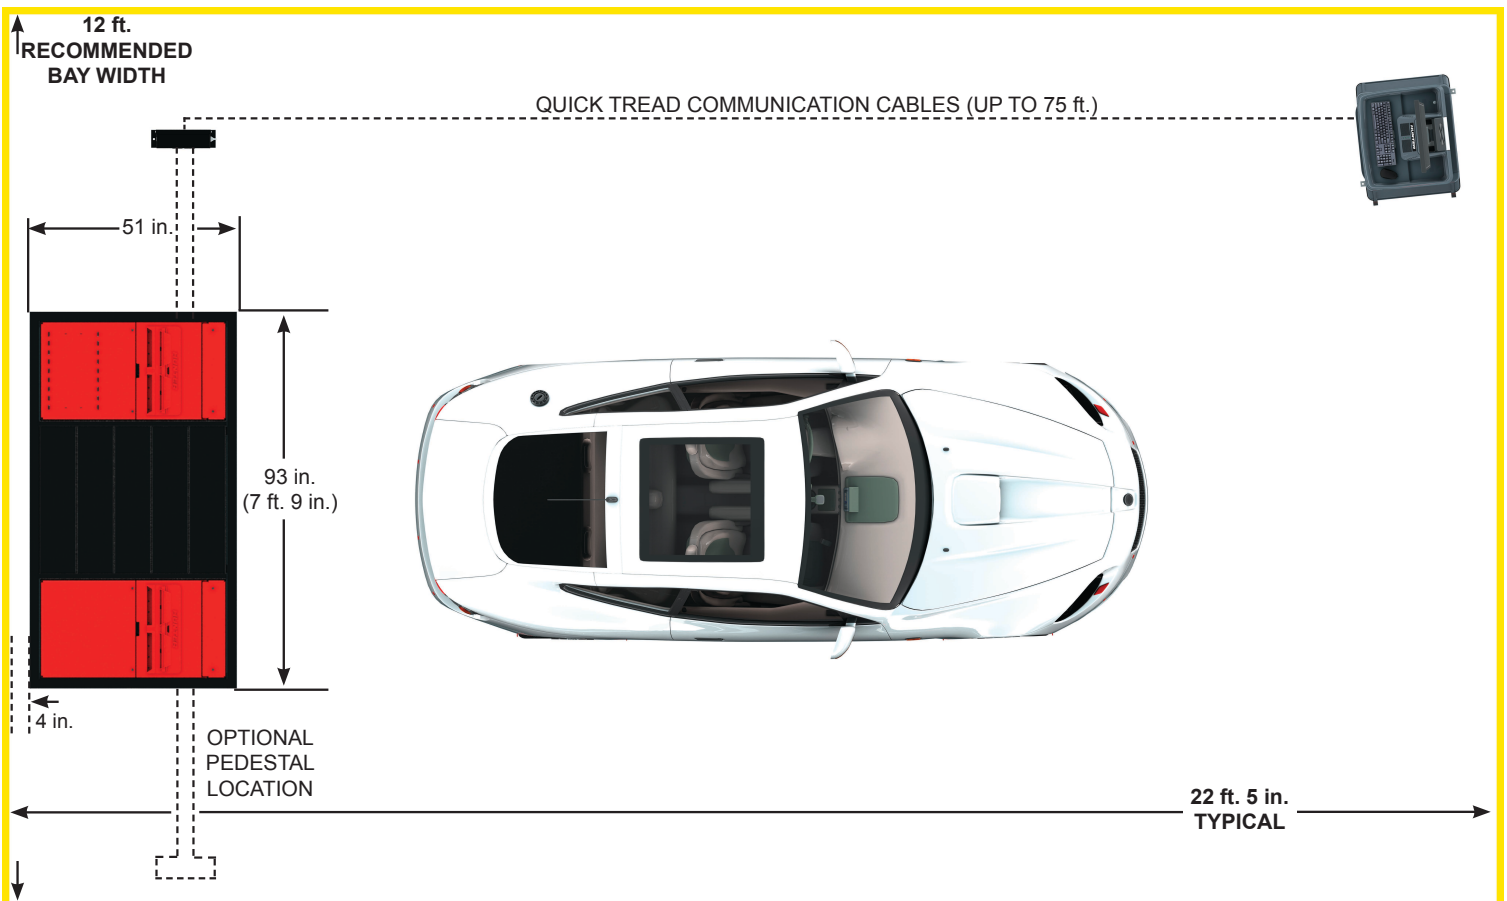

Continued on Page 2

For inspection information visit:  
[www.hunter.com/inspection](http://www.hunter.com/inspection)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
**800 448-6848**

For local contact visit:  
[www.hunter.com/company/findrep.cfm](http://www.hunter.com/company/findrep.cfm)

Form 6897-T, 05-15a  
Copyright © 2015, Hunter Engineering Company

## Flush Mounted

**HUNTER**  
**Engineering Company**

Technical drawing of the Hunter 2000 mobile workstation, showing front and side views with dimensions.

**Front View Dimensions:**

- Height: 67 1/4 in. (5 ft. 7 1/4 in.)
- Width: 32 in.

**Side View Dimensions:**

- Depth: 23 1/2 in.

Form 6897-T, 05-15a  
Copyright © 2015, Hunter Engineering Company